



Japanese Technology since 1912

CMA-B-D

Data Book 60Hz



	Page
- SPECIFICATIONS^①	200
PERFORMANCE RANGE and SELECTION CHART CMA	201
PERFORMANCE RANGE and SELECTION CHART CMB	202
PERFORMANCE RANGE and SELECTION CHART CMD	203
TYPE KEY and CURVE SPECIFICATIONS	204
PERFORMANCE CURVES CMA	205
PERFORMANCE CURVES CMB	206
PERFORMANCE CURVES CMD	207
- CONSTRUCTIONS	300
SECTIONAL VIEW MODELS (UP TO 106)	300
SECTIONAL VIEW MODELS (156 AND ABOVE)	301
MECHANICAL SEAL (UP TO 106)	302
MECHANICAL SEAL (156 AND ABOVE)	303
BEARINGS	304
- DIMENSIONS and WEIGHT	400
PUMP DRAWING	400
DIMENSIONS TABLE	401
PACKING	402
- TECHNICAL DATA	500
MOTOR DATA	500

SPECIFICATIONS

60Hz

Rev. J

PUMP		
Liquid Handled	Type of liquid	Clean water
	Temperature [°C]	min. +5 max. +40 (CMA up to 106) max. +90 (the other)
Maximum working pressure [MPa]		0.6 (CMA up to 106; CMB up to 306; CMD) 0.8 (the other)
Construction	Impeller	Closed centrifugal
	Shaft seal type	Mechanical seal
	Bearing	Sealed ball bearing
Pipe Connection	Suction	G 1" (CMA up to 106) UNI ISO 228 G 1"¼ (CMA 156 and above) UNI ISO 228 G 2" (CMB) UNI ISO 228 G 2"½ (CMD) UNI ISO 228
	Discharge	G 1" (CMA) UNI ISO 228 G 1"¼ (CMB) UNI ISO 228 G 2"½ (CMD) UNI ISO 228
Material	Casing	Cast iron
	Impeller	PPE + PS glass fibre reinforced - Brass - Cast iron see application page 300
	Shaft seal	Ceramic/Carbon/NBR
	Shaft	AISI 416 (integral) AISI 303 (wet extension) AISI 304 (wet extension) see application page 301
	Bracket	Cast iron - Aluminium see application page 300
	Casing cover	AISI 304 see application page 300
Applicable standard of test		ISO 9006:2012 - Grade 3B


MOTOR		
Type	Electric - TEFC	
	Single Phase	Three Phase
Efficiency Level (Reg.1781/2019)	IE2**	IE3
No. Of Poles	2	
Rotation speed [min ⁻¹]	≈ 3400	
Insulation Class	F	
Protection degree	IP 44	
Power rating	[kW]	0.37 ÷ 1.5
	[HP]	0.5 ÷ 2
Frequency [Hz]	60	
Voltage [V]	220-230 ±6%	220/380 -6% +10% (from 0.4 kW up to 0.6 kW) 220/380 ±10% (from 0.75 kW up to 4 kW) 220/380-460 ±10% (IE3* 0.75 kW up to 4 kW)
Capacitor	Built in	-
Over load protection	Built in	Provided by the user
Casing material	Aluminium	
Base material / motor support	Aluminium / Cast iron / Plastic foot	
Dimensions of cable entry	PG11 - PG13.5 - PG16 - M16x1.5 - M20x1.5 (see dimensions page 401)	

** only for 056M-076M-106M models

PERFORMANCE RANGE and SELECTION CHART

60Hz


Rev. J

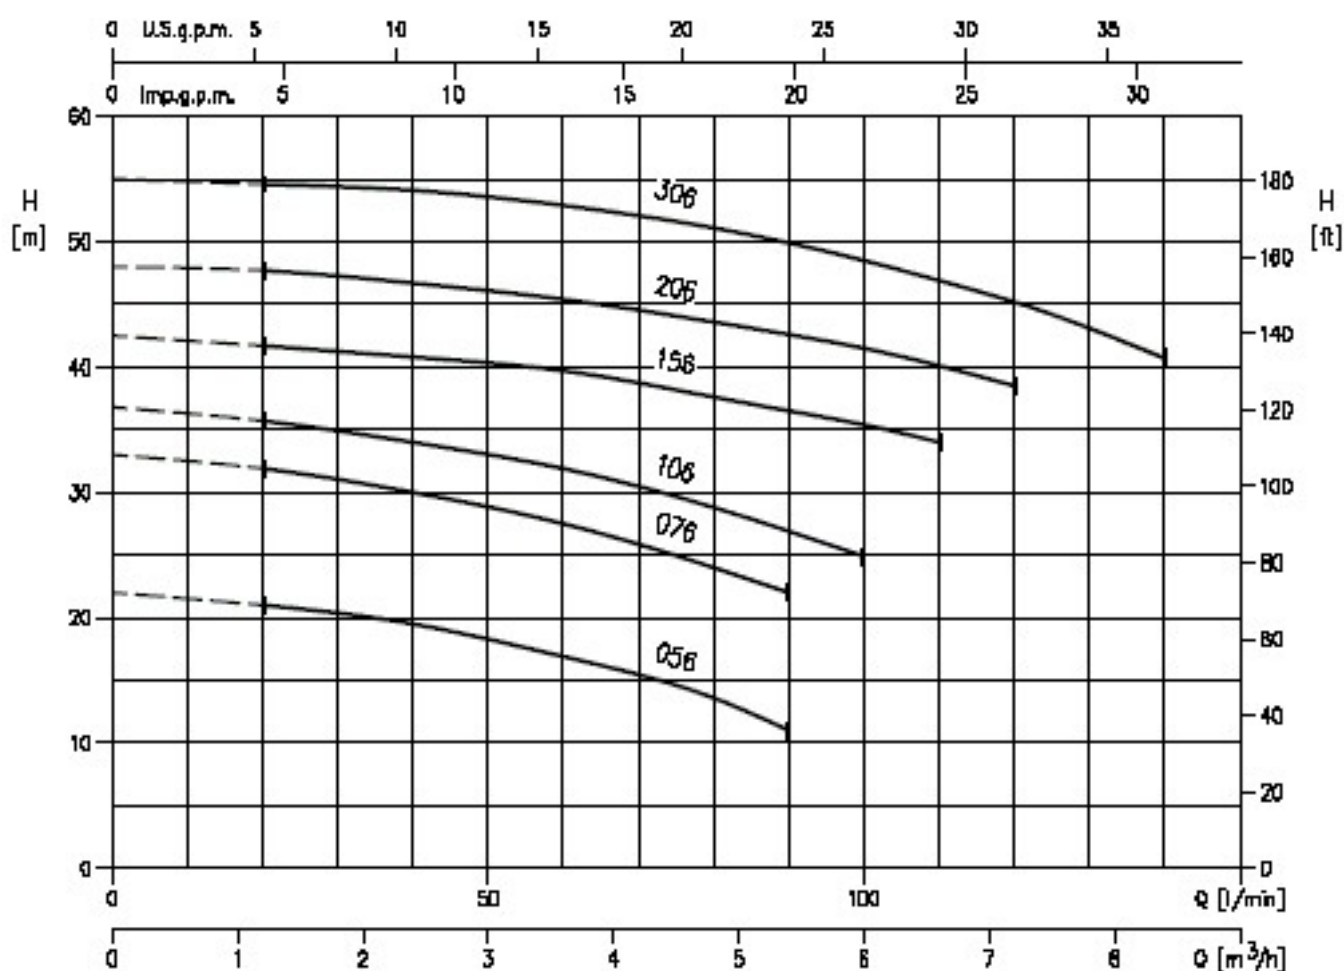CMA
PERFORMANCE RANGE

SELECTION CHART

Pump type		Q =Capacity														
		l/min	0	20	30	40	50	60	70	80	90	100	110	120	130	140
Single-phase	Three-phase	m³/h	0	1,2	1,8	2,4	3	3,6	4	4,8	5,4	6	6,6	7,2	7,8	8,4
H=Total manometric head in meters																
CMA 056 M	CMA 056 T	22	21	20.5	19.5	18	16.9	15.5	13.6	11	-	-	-	-	-	-
CMA 076 M	CMA 076 T	33	31.9	31	30	28.5	27.5	26	24	22	-	-	-	-	-	-
CMA 106 M	CMA 106 T	36.8	35.7	35	34	33	32	30.5	29	27	24.9	-	-	-	-	-
CMA 156 M	CMA 156 T	42.5	41.5	41	40.5	40	39.5	38.5	37.5	36.5	35.5	34	-	-	-	-
CMA 206 M	CMA 206 T	48	47,5	47	46,5	46	45,5	44,5	43,5	42,5	41,5	40	38,5	-	-	-
-	CMA 306 T	55	54,5	54,3	54	53,5	53	52	51	50	48,5	47	45	43	40,5	-

CMB PERFORMANCE RANGE

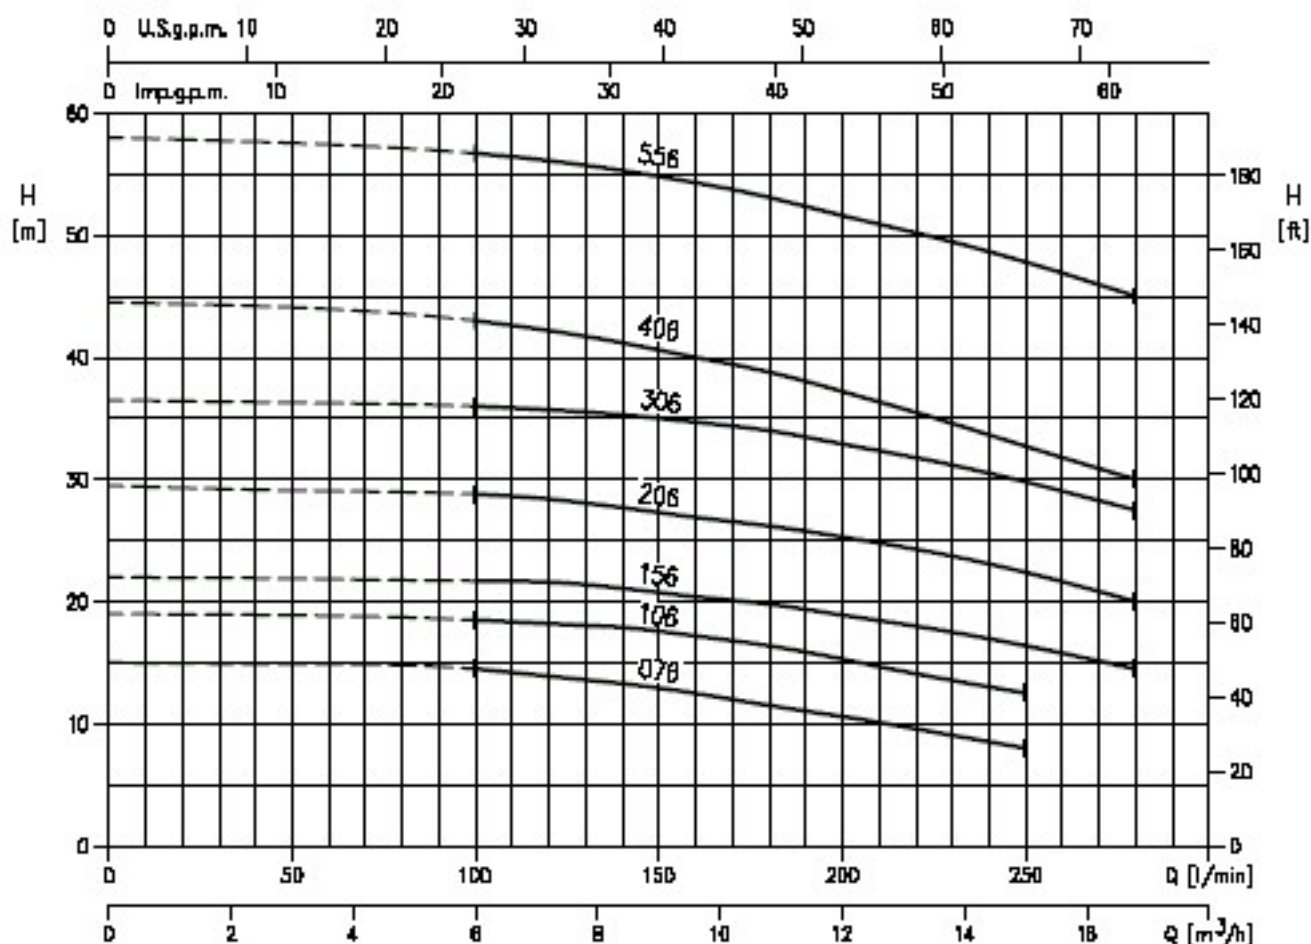

SELECTION CHART

Pump type		Q =Capacity										
		l/min	0	100	120	140	160	180	200	220	250	280
Single-phase	Three-phase	m³/h	0	6	7,2	8,4	9,6	10,8	12	13,2	15	16,8
H=Total manometric head in meters												
CMB 076 M	CMB 076 T	15	14.5	13.9	13.3	12.5	11.5	10.6	9.6	8	-	-
CMB 106 M	CMB 106 T	19	18.5	18.2	17.9	17.2	16.4	15.3	14.1	12.5	-	-
CMB 156 M	CMB 156 T	22	21.7	21.6	21.1	20.4	19.8	18.9	18	16.4	14.5	-
CMB 206 M	CMB 206 T	29.5	28.8	28.4	27.7	26.9	26.2	25.3	24.3	22.4	20	-
-	CMB 306 T	36.5	36	35.7	35.3	34.7	34	32.9	31.8	29.8	27.5	-
-	CMB 406 T	44.5	43	42	41	40	38.8	37.2	35.5	32.7	30	-
-	CMB 556 T	58	56.5	56	55	54	53	51.5	50	48	45	-


PERFORMANCE RANGE and SELECTION CHART

60Hz

Rev. J

CMD

PERFORMANCE RANGE

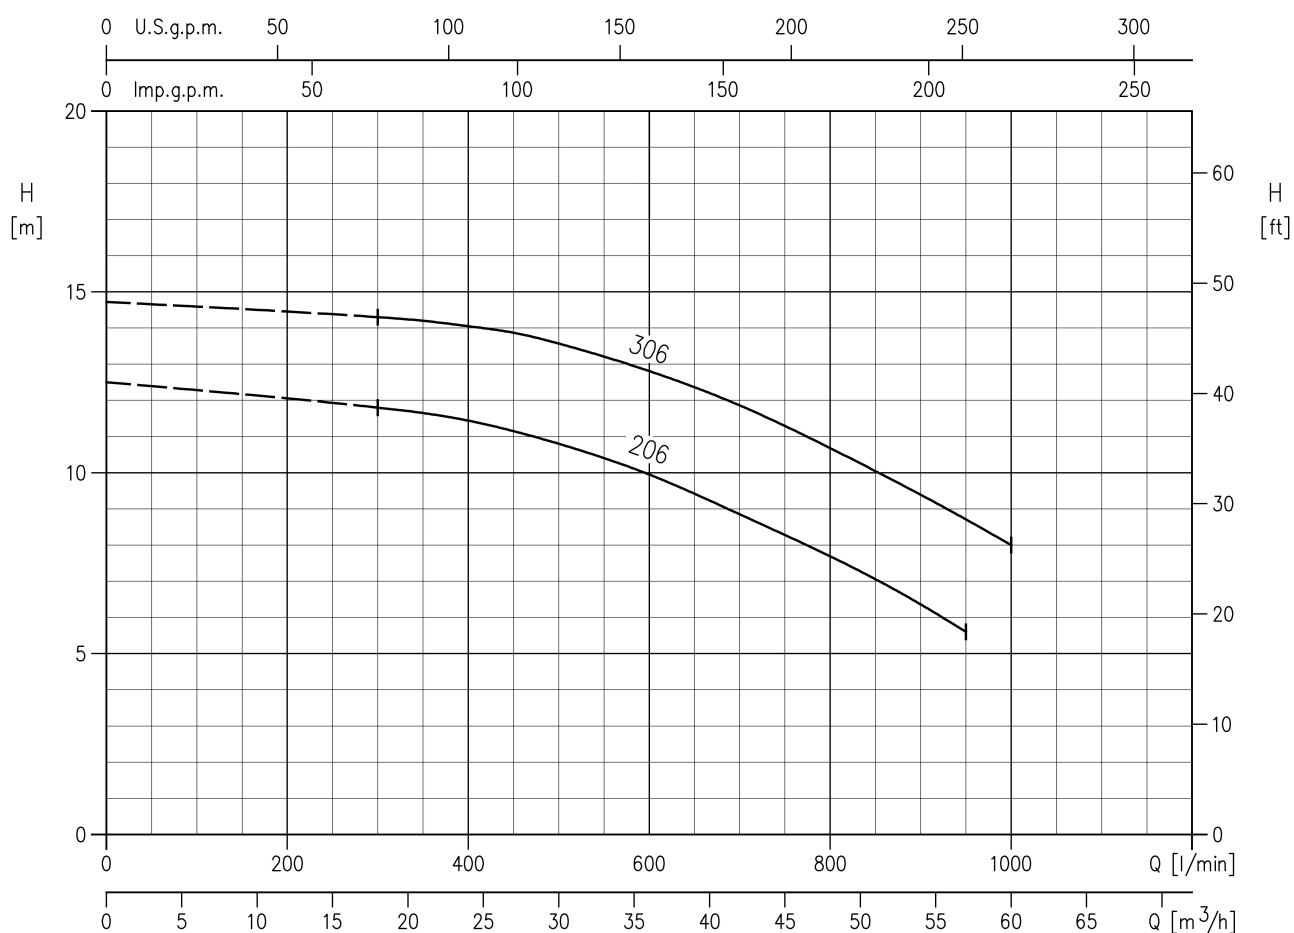

SELECTION CHART


Pump type	Power		Q =Capacity													
			l/min	0	300	350	400	450	500	600	700	800	900	950	1000	1100
Three-phase	[kW]	[HP]	m³/h	0	18	21	24	27	30	36	42	48	54	57	60	66
H=Total manometric head in meters																
CMD 206 T	1,5	2	13	11,8	11,6	11,4	11,1	10,8	9,9	8,8	7,7	6,3	5,6	-	-	-
CMD 306 T	2,2	3	15	14,3	14,2	14	13,9	13,6	12,8	11,8	10,7	9,4	8,7	8	-	-

TYPE KEY AND CURVE SPECIFICATIONS

60Hz

Rev. J

TYPE KEY

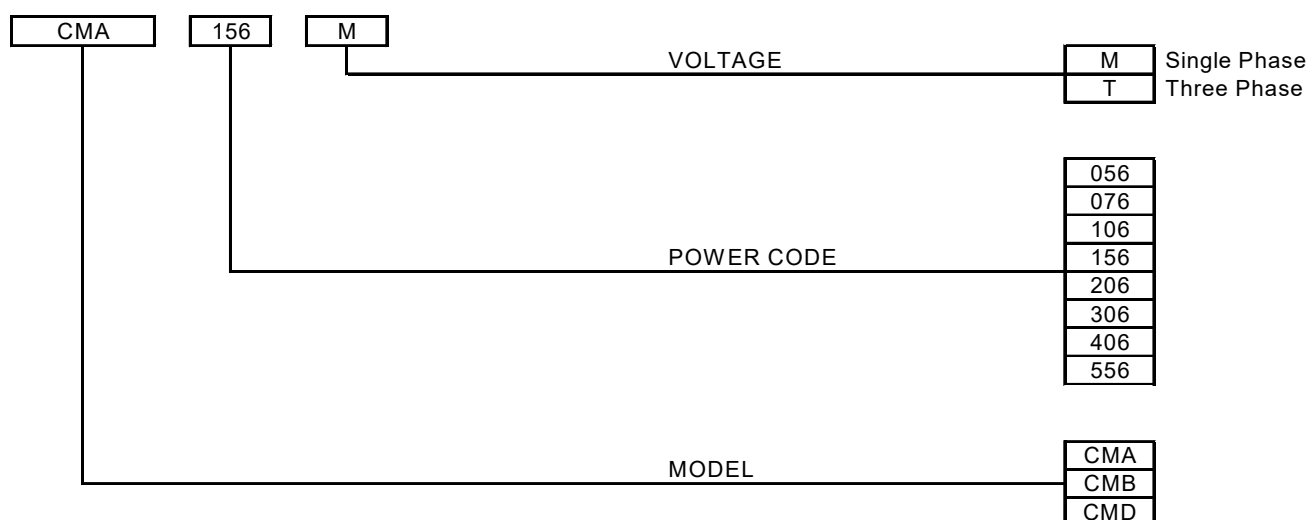

CURVE SPECIFICATIONS

The specifications below qualify the curves shown on the following pages.

Tolerances according to ISO 9006:2012 - Grade 3B

The curves refer to effective speed of asynchronous motors at 60Hz, 2 poles.

Measurements were carried out with clean water at 20°C of temperature and with a kinematic viscosity of $\nu = 1 \text{ mm}^2/\text{s}$ (1 cSt)

The continuous curves indicate the recommended working range. The dotted curve is only a guide.

In order to avoid the risk of over-heating, the pumps should not be used at a flow rate below 10% of best efficiency point.

Symbols explanation:

Q = volume flow rate
H = total head

CMA 056 - Impeller diameter = 113 mm


CMA 076 - Impeller diameter = 140 mm

CMA 156 - Impeller diameter = 151 mm

CMA 106 - Impeller diameter = 139 mm


CMA 206 - Impeller diameter = 159 mm

CMA 306 - Impeller diameter = 173 mm

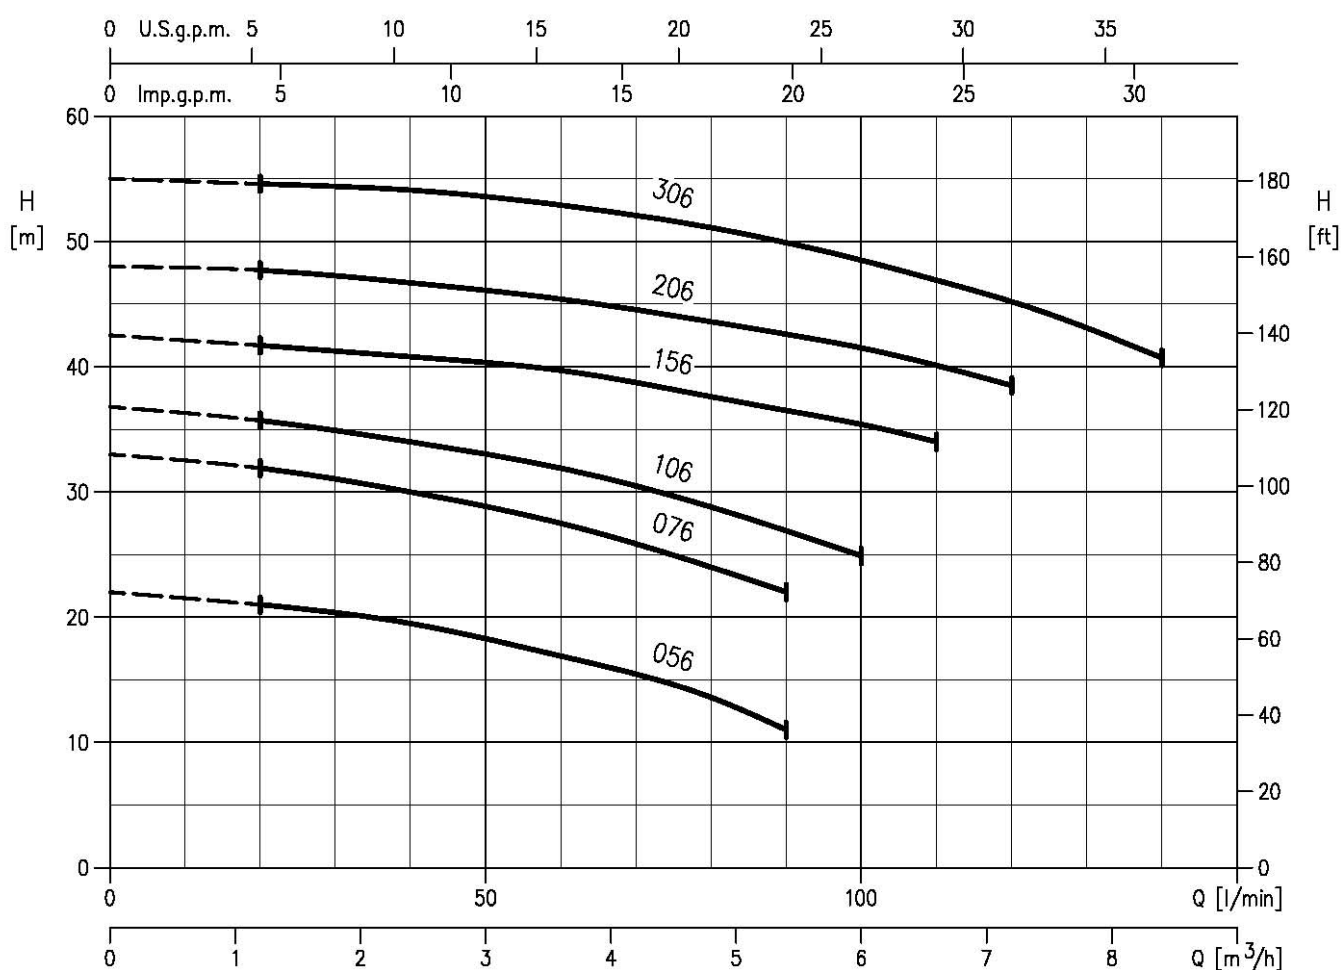Rotation speed $\approx 3400 \text{ min}^{-1}$

Test standard: ISO 9006:2012 - Grade 3B


CMB 076 - Impeller diameter = 96 mm
 CMB 106 - Impeller diameter = 105 mm
 CMB 156 - Impeller diameter = 111 mm
 CMB 206 - Impeller diameter = 128 mm
 CMB 306 - Impeller diameter = 142 mm
 CMB 406 - Impeller diameter = 160 mm
 CMB 556 - Impeller diameter = 176 mm

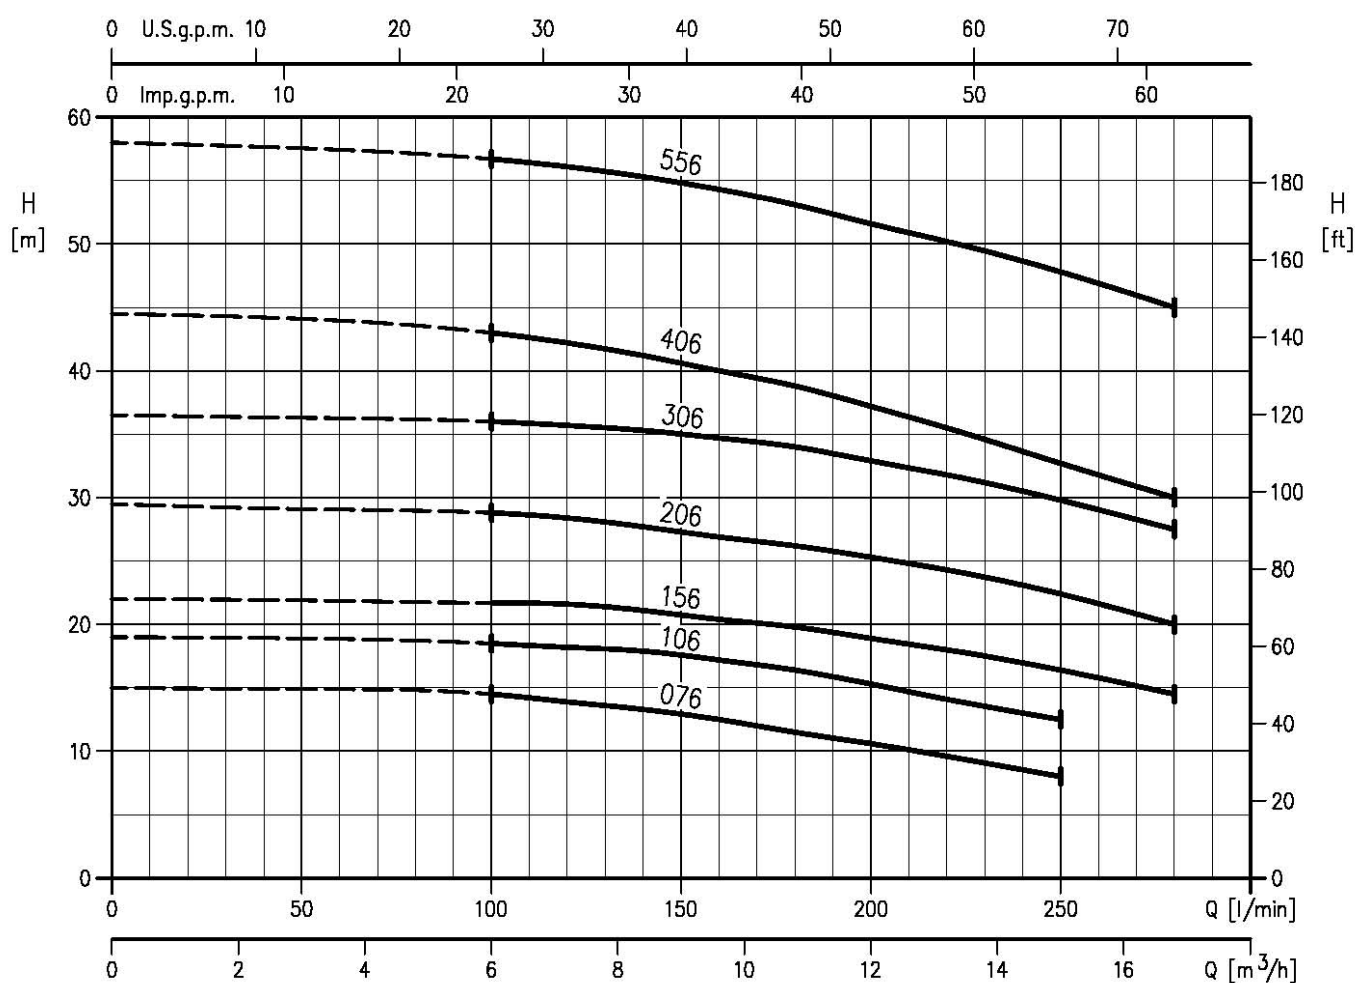


Rotation speed $\approx 3400 \text{ min}^{-1}$
 Test standard: ISO 9006:2012 - Grade 3B

CMD 206 - Impeller diameter = 96 mm

CMD 306 - Impeller diameter = 101 mm

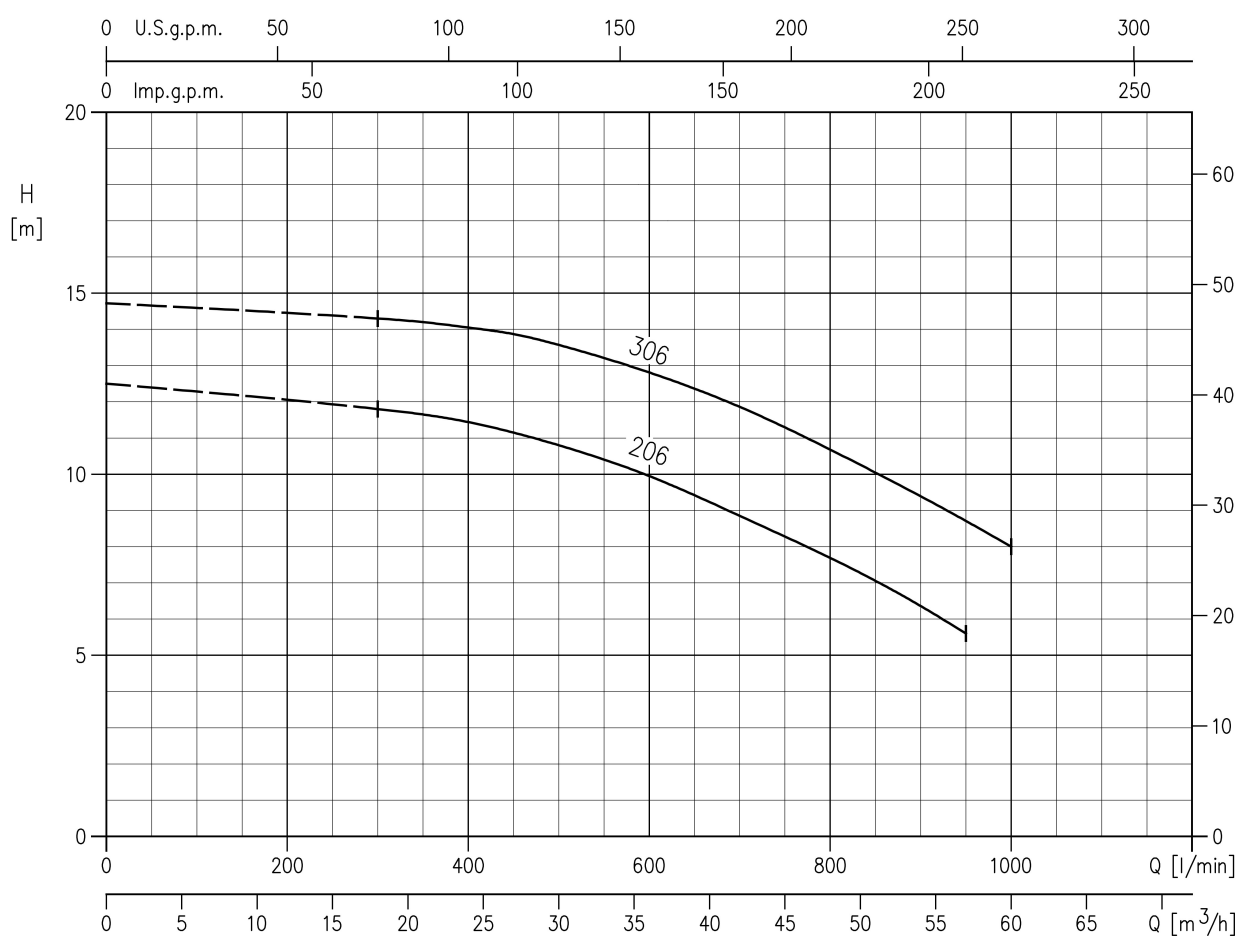Rotation speed $\approx 3400 \text{ min}^{-1}$

Test standard: ISO 9006:2012 - Grade 3B

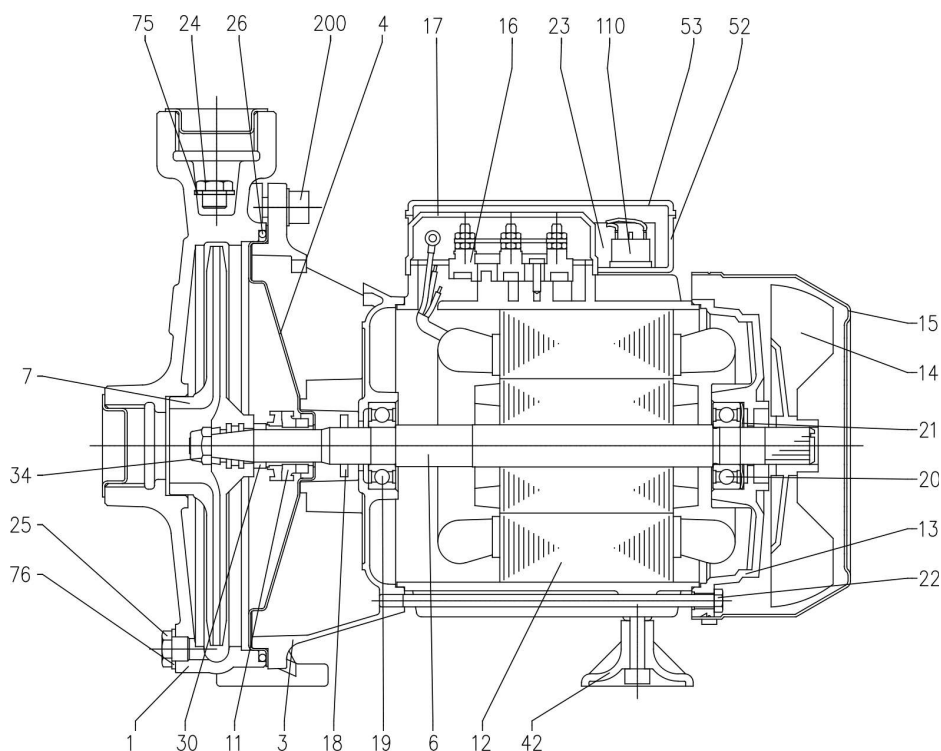SECTIONAL VIEW
(UP TO 106)

N°	PART NAME	MATERIAL	Q.TY
1	Casing	Cast iron	1
3	Motor bracket	Aluminium	1
4	Casing cover	AISI 304	1
6	Shaft with rotor	[1]	1
7	Impeller	[2]	1
11	Mechanical seal [3]	Carbon/Ceramic/NBR	1
12	Motor frame with stator	-	1
13	Motor cover	Aluminium	1
14	Fan	PA6	1
15	Fan cover	Fe P04 Zincate	1
16	Terminal box	-	1
17	Terminal box cover [4]	Aluminium	1
18	Splash ring	NBR	1
19	Pump side ball bearing	-	1
20	Fan side ball bearing	-	1

N°	PART NAME	MATERIAL	Q.TY
21	Adjusting ring	Steel C70	1
22	Tie rod	Fe 42 Zincate	4
23	Capacitor [5]	-	1
24	Priming plug	Brass	1
25	Drain plug	Brass	1
26	O-ring	NBR	1
30	Mechanical seal spacer [6]	Brass	1
34	Impeller nut [7]	AISI 304	1
42	Foot	PP	1
52	Capacitor box [5]	ABS class V-0	1
53	Capacitor box cover [5] [8]	ABS class V-0 [8]	1
75	Washer	Aluminium	1
76	Washer	Aluminium	1
110	Protector [5]	-	-
200	Screw	Zincate Steel Cl. 8.8 ISO 898-1	4

[1] Material: AISI 416 (integral) for CMA 056

AISI 303 (wet extension) for other model;

[2] Material: PPE+PS mod. glass fibre reinforced for version CMA
Cast iron for version CMB

[3] See MECHANICAL SEAL pages 302-303


[4] Only for three phase

[5] Only for single phase

[6] Only for version: CMA 056, CMB 076-106

[7] Except for CMA 056

[8] With gasket in NBR only for version single phase: CMA 056-076-106, CMB 076-106

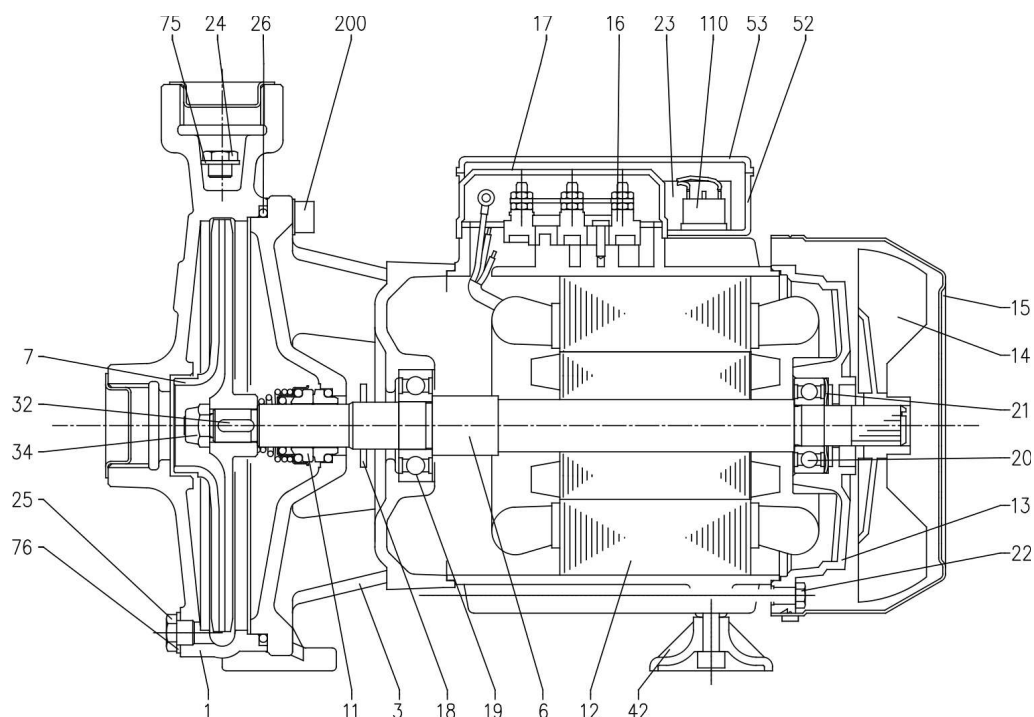SECTIONAL VIEW
(156 AND ABOVE)

N°	PART NAME	MATERIAL	Q.TY
1	Casing	Cast iron	1
3	Motor bracket	Cast iron	1
6	Shaft with rotor	[1]	1
7	Impeller	[2]	1
11	Mechanical seal [3]	Carbon/Ceramic/NBR	1
12	Motor frame with stator	-	1
13	Motor cover	Aluminium	1
14	Fan	PA6	1
15	Fan cover	Fe P04 Zincate	1
16	Terminal board	-	1
17	Terminal box cover [4]	Aluminium	1
18	Splash ring	NBR	1
19	Pump side ball bearing	-	1
20	Fan side ball bearing	-	1
21	Adjusting ring	Steel C70	1

N°	PART NAME	MATERIAL	Q.TY
22	Tie rod	Fe 42 Zincate	4
23	Capacitor [5]	-	1
24	Priming plug	Brass	1
25	Drain plug	Brass	1
26	O-ring	NBR	1
32	Key	AISI 316	1
34	Impeller nut	AISI 304	1
42	Foot	PP	1
52	Capacitor box [5]	ABS class V-0	1
53	Capacitor box cover [5]	ABS class V-0	1
75	Washer	Aluminium	1
76	Washer	Aluminium	1
110	Protector [5]	-	1
200	Screw	Zincate Steel Cl. 8.8 ISO 898-1	4

[1] Material: AISI 303 (wet extension) for version: CMA, CMB 156-206-306, CMD 206-306

AISI 304 (wet extension) for version: CMB 406-556

[2] Material: Brass for version: CMA, CMB 206-306-406-556


Cast iron for version: CMB 156, CMD

[3] See MECHANICAL SEAL pages 302-303

[4] Only for three phase

[5] Only for single phase


MECHANICAL SEAL (UP TO 106)

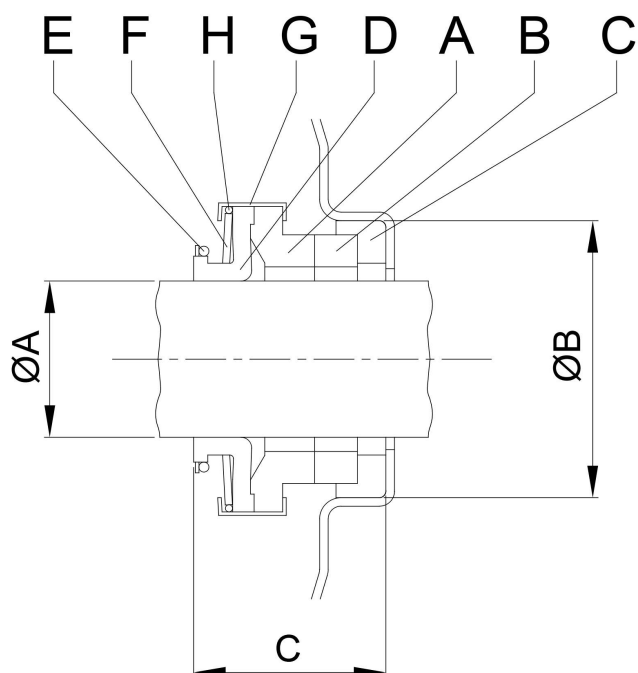

Pump type		Dimensions mm		
Single phase	Three phase	Ø A	Ø B	C
CMA 056 M	CMA 056 T	12	26	18,5
CMA 076 M	CMA 076 T	13	26	18,3
CMA 106 M	CMA 106 T			
CMB 076 M	CMB 076 T			
CMB 106 M	CMB 106 T			

REF	PART NAME	MATERIAL Standard version
A	Rotary seal ring	Carbon Graphite
B	Stationary seal ring	Ceramic
C	Gasket	NBR
D	Bellows	NBR
E	Ring	AISI 304
F	Self driving spring	AISI 304
G	Frame	AISI 304
H	Retainer ring	AISI 304

MECHANICAL SEAL (156 AND ABOVE)

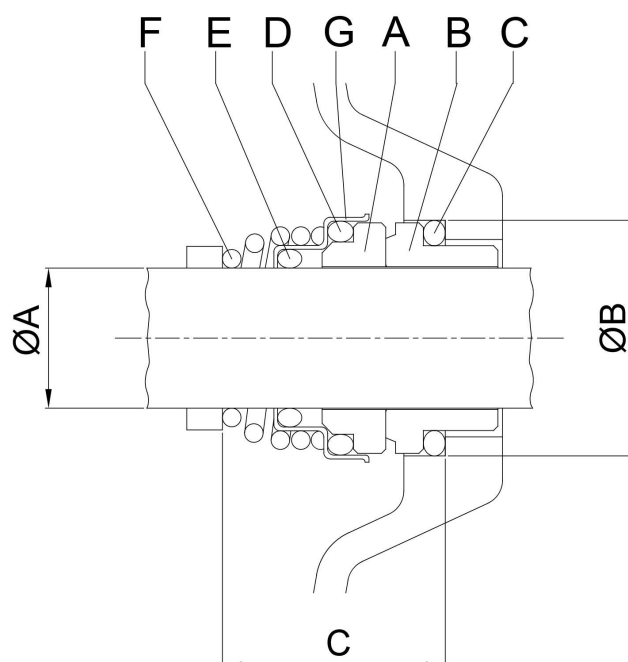


Pump type		Dimensions mm		
Single phase	Three phase	Ø A	Ø B	C
CMA 156 M	CMA 156 T	18	30,9	32
CMA 206 M	CMA 206 T			
-	CMA 306 T			
CMB 156 M	CMB 156 T			
CMB 206 M	CMB 206 T			
-	CMB 306 T			
-	CMB 406 T	20	30,9	33
-	CMB 556 T			
-	CMD 206 T	18		32
-	CMD 306 T			

REF	PART NAME	MATERIAL Standard version
A	Rotary seal ring	Ceramic
B	Stationary seal ring	Carbon Graphite
C	O Ring	NBR
D	O Ring	NBR
E	O Ring	NBR
F	Self driving spring	AISI 316
G	Frame	AISI 304

BEARINGS

Pump type		Ball Bearing	
Single phase	Three Phase	Pump side	Fan side
CMA 056M	CMA 056T	6201	6201
CMA 076M	CMA 076T	6202	6202
CMA 106M	CMA 106T	6202	6202
CMA 156M	CMA 156T	6204	6203
CMA 206M	CMA 206T	6204	6203
-	CMA 306T	6204	6203
CMB 076M	CMB 076T	6202	6202
CMB 106M	CMB 106T	6202	6202
CMB 156M	CMB 156T	6204	6203
CMB 206M	CMB 206T	6204	6203
-	CMB 306T	6204	6203
-	CMB 406T	6306	6205
-	CMB 556T	6306	6205
-	CMD 206T	6204	6203
-	CMD 306T	6204	6203

PUMP DRAWING

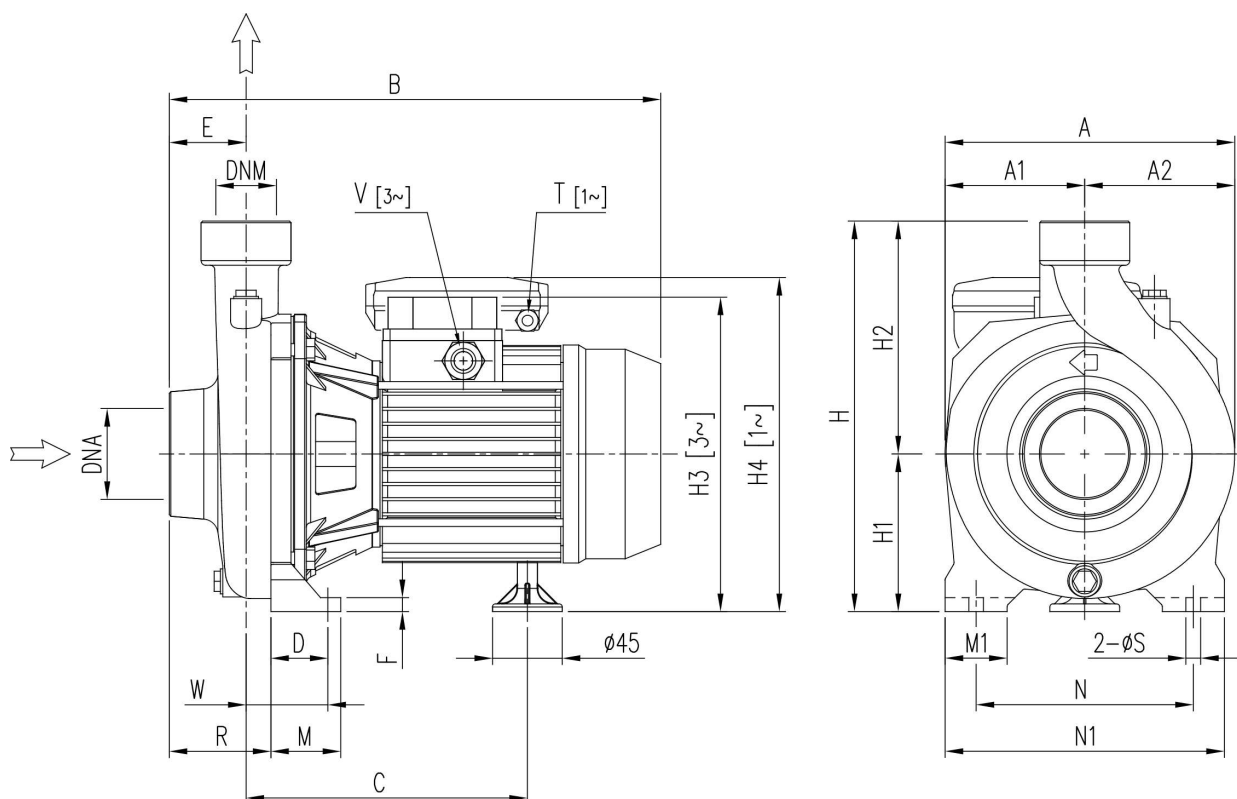


[1~] Single phase
[3~] Three phase

DIMENSIONS TABLE

Pump type	Dimensions [mm]																								Weight [kgf]
	A	A1	A2	B	C	D	E	F	H	H1	H2	H3	H4	M	M1	N	N1	R	T	V	W	S	DNA	DNM	
CMA 056M	187	91	96	302	171	37	45	9	232	97	135	-	205	45	40	140	180	45	PG11	-	37	9.5	G 1	G 1	10
CMA 056T	158.5	76.5	82	262	159	30	44	8	202	82	120	172.5	-	40	40	110	150	44	-	PG11	30	9.5	G 1	G 1	9
CMA 076M	187	91	96	302	171	37	45	9	232	97	135	-	199	45	40	140	180	45	PG11	-	37	9.5	G 1	G 1	12
CMA 076T	187	91	96	301	172	37	45	9	232	97	135	197.5	-	45	40	140	180	45	-	PG11	37	9.5	G 1	G 1	10
CMA 106M	187	91	96	313	172	37	45	9	232	97	135	-	198	45	40	140	180	45	PG11	-	37	9.5	G 1	G 1	13
CMA 106T	187	91	96	302	171	37	45	9	232	97	135	198	-	45	40	140	180	45	-	M16x1.5	37	9.5	G 1	G 1	12
CMA 156M	196	97	99	348	209	42	45.5	9	252	100	152	-	232	50	40	155	194	45.5	PG13,5	-	42	9.5	G 1 ¼	G 1	20
CMA 156T	196	97	99	371	207	42	45.5	9	252	100	152	219	-	50	40	155	194	45.5	-	M20x1.5	42	9.5	G 1 ¼	G 1	18
CMA 206M	223	110.5	112.5	361	209	42	45.5	9	285	115	170	-	247	50	40	180	220	45.5	PG13,5	-	42	9.5	G 1 ¼	G 1	23
CMA 206T	223	110.5	112.5	359	207	42	45.5	9	285	115	170	234	-	50	40	180	220	45.5	-	M20x1.5	42	9.5	G 1 ¼	G 1	22
CMA 306T	223	110.5	112.5	372	207	42	45.5	9	285	115	170	234	-	50	40	180	220	45.5	-	M20x1.5	42	9.5	G 1 ¼	G 1	23
CMB 076M	188	90	98	316	183	37	49.5	9	251.5	101.5	150	-	127.5	45	40	140	180	65.5	PG11	-	53	9.5	G 2	G 1 ¼	11.5
CMB 076T	188	90	98	317	182	37	49.5	9	251.5	101.5	150	203.5	-	45	40	140	180	65.5	-	PG11	53	9.5	G 2	G 1 ¼	12
CMB 106M	188	90	98	328	183	37	49.5	9	251.5	101.5	150	-	127.5	45	40	140	180	65.5	PG11	-	53	9.5	G 2	G 1 ¼	15.5
CMB 106T	188	90	98	317	182	37	49.5	9	251.5	101.5	150	202.5	-	45	40	140	180	65.5	-	M16x1.5	53	9.5	G 2	G 1 ¼	14
CMB 156M	188	90	98	350	207	37	49.5	9	251.5	101.5	150	-	233.5	45	40	140	180	65.5	PG13,5	-	53	9.5	G 2	G 1 ¼	19
CMB 156T	188	90	98	373	205	37	49.5	9	251.5	101.5	150	220.5	-	45	40	140	180	65.5	-	M20x1.5	53	9.5	G 2	G 1 ¼	19
CMB 206M	212.5	102	110.5	374	210	37	57.5	9	271.5	111.5	160	-	243.5	45	40	160	200	76.5	PG13,5	-	56	9.5	G 2	G 1 ¼	21
CMB 206T	212.5	102	110.5	385	208	37	57.5	9	271.5	111.5	160	230.5	-	45	40	160	200	76.5	-	M20x1.5	56	9.5	G 2	G 1 ¼	21
CMB 306T	212.5	102	110.5	385	208	37	57.5	9	271.5	111.5	160	230.5	-	45	40	160	200	76.5	-	M20x1.5	56	9.5	G 2	G 1 ¼	22
CMB 406T	248.5	121	127.5	460	286	48	60	12	323.5	133.5	190	274.5	-	60	50	190	240	77.5	-	M20x1.5	66	12	G 2	G 1 ¼	39
CMB 556T	248.5	121	127.5	467	246	48	60	12	323.5	133.5	190	274.5	-	60	50	190	240	77.5	-	M20x1.5	66	12	G 2	G 1 ¼	41
CMD 206T	211	97	114	409	221	37	68	12	271.5	111.5	160	230.5	-	45	40	160	200	100.5	-	M20x1.5	70	9.5	G 2 ½	G 2 ½	22
CMD 306T	211	97	114	409	221	37	68	12	271.5	111.5	160	230.5	-	45	40	160	200	100.5	-	M20x1.5	70	9.5	G 2 ½	G 2 ½	24

PACKING

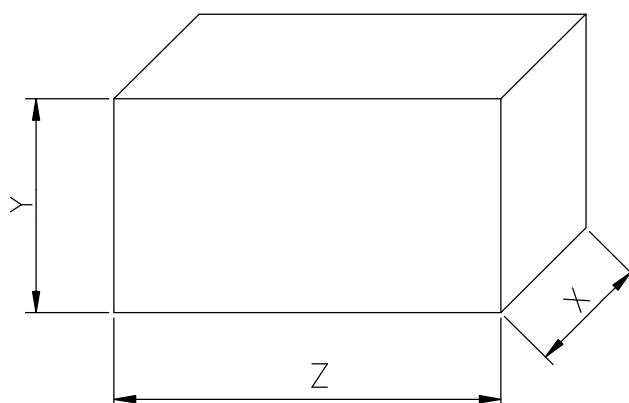

Pump type		Packing [mm]						Weight [kgf]	
Single Phase	Three Phase	X		Y		Z		[1~]	[3~]
		[1~]	[3~]	[1~]	[3~]	[1~]	[3~]		
CMA 056M	CMA 056T	210	180	270	240	330	300	10,5	8
CMA 076M	CMA 076T		210		270		330	12,5	12
CMA 106M	CMA 106T							14	12
CMA 156M	CMA 156T	225	225	290	290	380	380	21	21
CMA 206M	CMA 206T	250	250	325	325	400	400	24	25
-	CMA 306T	-		-	-	-	-	-	25
CMB 076M	CMB 076T	210	210	290	290	370	370	12,5	13
CMB 106M	CMB 106T							16	15
CMB 156M	CMB 156T	225	225			380	380	20	21
CMB 206M	CMB 206T	250	250	325	325	400	400	22	24
-	CMB 306T	-		-	-	-	-	-	23
-	CMB 406T	-	280	-	340	-	490	-	44
-	CMB 556T	-		-		-		-	48
-	CMD 206T	-	237	-	320	-	427	-	25
-	CMD 306T	-		-		-		-	25

[1~] Single phase

[3~] Three phase

MOTOR DATA

Pump type	Power		Efficiency	Capacitor		Efficiency (% load) and power factor				Input	Full load current		Locked rotor current	
Single Phase	[kW]	[HP]	[IE2 / IE3]	[μF]	[V]	η %			cos-φ	[kW]	[A]		[A]	
						50%	75%	100%			110 V	220 V	110 V	220 V
CMA 056M	0,55	0,75	IE2	50	250	65,3	72,7	75,3	0,91	0,73	7,2	-	36,1	-
				12,5	450	63,8	71,2	75,7	0,96	0,75	-	3,6	-	17,4
CMA 076M	0,75	1,0	IE2	60	250	63,0	71,5	75,5	0,86	0,99	10,4	-	66,5	-
				25	450	63,1	69,8	78,3	0,94	0,96	-	4,7	-	32,3
CMA 106M	0,9	1,2	IE2	31,5	450	64,1	73,2	79,4	0,86	1,17	-	5,9	-	45,3
CMA 156M	1,7	2,3	-	31,5	450	-	-	-	0,97	2,08	-	9,7	-	55,0
CMA 206M	1,8	2,4	-	40	450	-	-	-	0,95	2,29	-	10,5	-	69,0
CMB 076M	0,55	0,75	IE2	12,5	450	63,8	71,2	75,7	0,96	0,75	-	3,6	-	17,4
CMB 106M	0,9	1,2	IE2	31,5	450	64,1	73,2	79,4	0,86	1,17	-	5,9	-	45,3
CMB 156M	1,7	2,3	-	31,5	450	-	-	-	0,97	2,08	-	9,7	-	55,0
CMB 206M	1,8	2,4	-	40	450	-	-	-	0,95	2,29	-	10,5	-	69,0

Pump type	Power		Efficiency	Efficiency (% load)			Efficiency (% load)			Input	Full load current			Locked rotor current			
	Three Phase	[kW]		[HP]	Three phase (380 V)			Three phase (460 V)			[A]			[A]			
					η %			η %			Three Phase			Three Phase			
				50%	75%	100%	50%	75%	100%	[kW]	220 V	380 V	460 V	220 V	380 V	460 V	
CMA 056T	0,37	0,5	IE3	75,7	77,1	75,9	71,8	75,1	78,8	0,55	1,8	1,0	1,0	8,6	4,9	6,0	
CMA 076T	0,55	0,75	IE3	82,3	83,5	83,2	80,5	83,1	84,6	0,9	2,8	1,6	1,5	17,9	10,3	12,5	
CMA 106T	0,75	1,0	IE3	80,7	81,9	81,3	78,4	81,6	83,1	0,9	2,8	1,6	1,5	16,9	9,7	11,8	
CMA 156T	1,1	1,5	IE3	84,2	84,7	84,5	83,2	84,7	85,7	1,75	5,3	3,1	2,9	40,2	23,2	28,1	
CMA 206T	1,5	2,0	IE3	86,5	86,8	86,2	86,9	87,8	87,4	2,48	7,5	4,3	4,1	55,7	32,2	38,9	
CMA 306T	2,2	3,0	IE3	86,5	86,8	86,2	86,9	87,8	87,4	2,48	7,5	4,3	4,1	55,7	32,2	38,9	
CMB 076T	0,55	0,75	IE3	82,3	83,5	83,2	80,5	83,1	84,5	0,9	2,7	1,6	1,5	17,9	10,3	12,5	
CMB 106T	0,75	1,0	IE3	80,7	81,9	81,3	78,4	81,6	83,1	0,9	2,8	1,6	1,5	16,9	9,7	11,8	
CMB 156T	1,1	1,5	IE3	84,2	84,7	84,5	83,2	84,7	85,7	1,75	5,3	3,1	2,9	40,2	23,2	28,1	
CMB 206T	1,5	2,0	IE3	86,5	86,8	86,2	86,9	87,8	87,4	2,48	7,5	4,3	4,1	55,7	32,2	38,9	
CMB 306T	2,2	3,0	IE3	86,5	86,8	86,2	86,9	87,8	87,4	2,48	7,5	4,3	4,1	55,7	32,2	38,9	
CMB 406T	3	4,0	IE3	86,8	87,0	87,5	87,0	87,9	88,5	3,42	10,2	5,9	5,6	75,7	43,7	52,8	
CMB 556T	4	5,5	IE3	89,7	89,6	88,6	86,1	88,4	88,5	4,52	13,5	7,8	7,6	107,1	61,8	74,9	
CMD 206T	1,5	2,0	IE3	86,5	86,8	86,2	86,9	87,8	87,4	2,48	7,5	4,3	4,1	55,7	32,2	38,9	



EBARA Pumps Europe S.p.A.
Via Torri di Confine 2/1 int. C
36053 Gambellara (Vicenza), Italy
Phone +39 0444 706811
ebarapumps.epe@ebaracom
www.ebaraeurope.com

EBARA Pumps Europe S.p.A. GERMANY
Elisabeth-Selbert-Straße 2
63110 Rodgau, Germany
Phone +49 (0) 6106-660 99-0
info.epde@ebaracom

EBARA Pumps South Africa (PTY) LTD
26 Kyalami Boulevard,
Kyalami Business Park, 1684, Midrand,
Gauteng, South Africa
Phone +27 11 466 1844
ebaraeurope@ebaracom

EBARA Pumps Europe S.p.A. UK
Unit A, Park 34
Collett Way - Didcot
Oxfordshire - OX11 7WB, United Kingdom
Phone +44 1895 439027
marketing.epuk@ebaracom

EBARA Pumps Europe S.p.A. FRANCE
122, Rue Pasteur
69780 Toussieu, France
Phone: +33 04 72 76 94 82
mktg.epr@ebaracom

EBARA Pumps East Africa
Delta Corner Tower 2, 13th Floor, Office 1308,
Chiromo Road, Westlands
P.O. Box 13796-00800, Nairobi
Phone: +254(0)722913119
info.epea@ebaracom

EBARA POMPY POLSKA Sp. z o.o.
ul. Działkowa 115 A
02-234 Warszawa, Poland
Phone +48 22 3909920
marketing.epl@ebaracom

EBARA Pumps RUS Ltd.
Prospekt Andropov 18, building 7, floor 11
115432 Moscow
Phone +7 499 6830133
mktg.epr@ebaracom